

DGM5518XSSE



5MP



PoE



WDR



Mobile
Surveillance




H.265




5MP H.265 IR Bullet IP Camera

FEATURES

- **POE (Power-over-Ethernet)** support to eliminate the use of power cables and reduce installation costs
- **ONVIF** () standard supported to simplify system integration
- **DWDR** to increase image recognizability in overexposure and dark areas
- **Waterproof** design on the Ethernet cable connector
- **Remote Surveillance**
 - **Fully compatible** with **iOS** and **Android** devices, and **Internet Explorer** on Windows operating system

DIMENSIONS

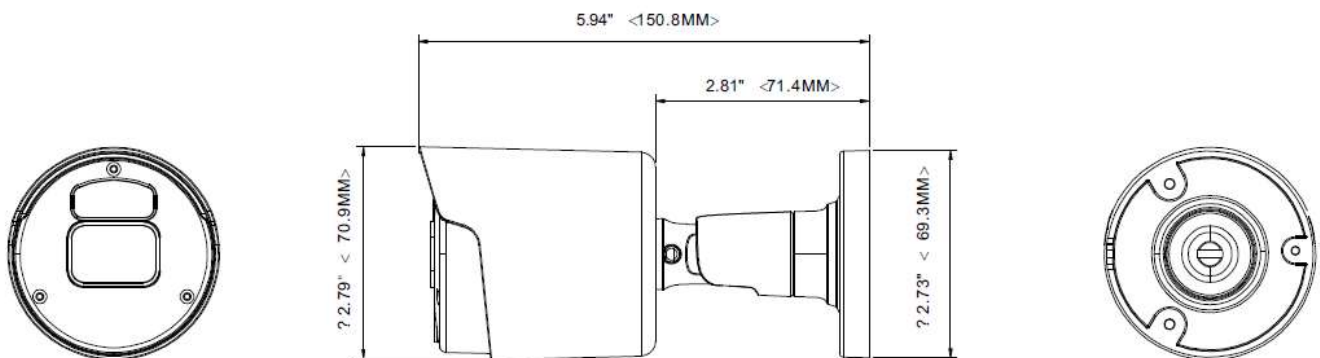

Dimensional tolerance: ± 5mm

● SPECIFICATIONS*

| Network | |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LAN Port | YES |
| LAN Speed | 10/100 Based-T Ethernet |
| Supported Protocols | TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, SMTP, NTP, UPnP, SNMP, HTTPS, FTP |
| ONVIF Compatible | YES (Profile S, Profile G, Profile T) |
| Security | (1) Multiple user access levels with password (2) IP address filtering (3) Digest authentication |
| Remote Access | Internet Explorer on Windows operating system |
| Video | |
| Network Compression | H.265 /H.264 |
| Video Resolution | Main Stream :5MP(2592*1944),4MP(2592x1520),3MP(2304x1296),1080P(1920x1080) Sub Steam :720P(1280x720),VGA(640x480),QVGA(320x240) Mobile Stream :QVGA (320x240) |
| Frame Rate | 30fps |
| Video bit rate | 8Kbps ~ 8Mbps |
| Multiple Video Streaming | Triple-Stream(Main/Sub/Mobile) |
| Bitrate control method | CBR / VBR |
| General | |
| Image Sensor | 1/2.7" Progressive CMOS image sensor |
| Min Illumination | Color 0.002Lux @(F1.2,AGC ON) |
| Shutter Speed | 1/5 ~ 1/20000 sec |
| Lens | 3.6 mm – F No. 1.6 |
| Viewing Angle | Horizontal: 91°, Vertical: 46°, Diagonal: 110° |
| SD storage | Micro SD slot, up to 256GB |
| IR Effective Distance** | Up to 30 meters |
| IR Shift | IR cut filter with auto switch |
| Video Analytics | Face Detection, Face Recognition, Attribute Detection, Pedestrian & Vehicle Detection, Perimeter Intrusion Detection, Line Crossing, Crossing Counting, Heat Map, Crowd Density Detection, Queue Length Detection, License Plate Detection, Rare Sound Detection |
| WDR | WDR |
| BLC | YES |
| ROI | YES |
| Privacy Mask | YES |
| Gain Control | Auto |
| Digital Noise Reduction | 3D DNR |
| Image Settings | Rotate mode, Saturation, Brightness, Contrast, Hue, Sharpness adjustable |
| Audio | Built-in microphone |
| Alarm Trigger | NO |
| Reset Button | YES |
| POE | YES (IEEE 802.3af) |

| | |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weather-proof | IP66 |
| Operating Temperature | -30°C ~ 55°C |
| Operating Humidity | 90 or less relative humidity |
| Power Source (±10%) | 12V / PoE |
| Power Consumption (±10%) | ≤ 6W |
| Net Weight (kg) | 0.4 |
| Dimension | Ø71 x 151mm |
| Others | |
| Mobile Surveillance | iOS & Android mobile devices |
| Motion Detection | YES |
| Event Notification | FTP / Email / SMS |
| RTC (real-time clock) | YES |
| Minimum Web Browsing Requirements | <ul style="list-style-type: none"> ·Intel core i3 or higher, or equivalent AMD ·2GB RAM ·AGP graphics card, Direct Draw, 32MB RAM ·Windows 10, Windows 8, Windows 7, Windows Vista & Windows XP, DirectX 9.0 or later ·Internet Explorer 7.x or later (Windows Edge not supported) |

*The specifications are subject to change without notice.